

SP Series

Close-coupled self-priming peripheral pumps with side channel and star impeller. Designed to remain primed even in the presence of waterdissolved gases or when the suction line is not filled with liquid.

The nickel-plated brass impeller prevents jamming due to oxidation.

Specifications

Delivery: up to 2.75 m³/h
 Head: up to 50 m
 Power supply: three-phase and single-phase 50 and 60 Hz
 Power: 0.55 kW to 0.75 kW
 Maximum operating pressure: 8 bar
 Temperature of pumped liquid: -10°C to +40°C
 Maximum ambient temperature: 40°C
 Insulation class: F
 Protection: IP55

Materials

Pump body: Cast iron
 Motor/pump support: Cast iron
 Impeller: Nickel-plated brass
 Front flange: Brass
 Rear diffuser plate: Brass
 Mechanical seal: Ceramic/Carbon/NBR
 Fill plug: Brass
 Elastomers: NBR

Applications

Water distribution

Washing

Pressure boosting

Irrigation



For a complete list of technical information, consult www.lowara.com


WDA Pompen BV

074-3490332 Werk
 0683702404 Mobiel
info@wdapompen.nl

Paul Pellastraat 15
 7558 HN Hengelo
 Nederland
www.wdapompen.nl

1

SP SERIES
Dimensions and weights

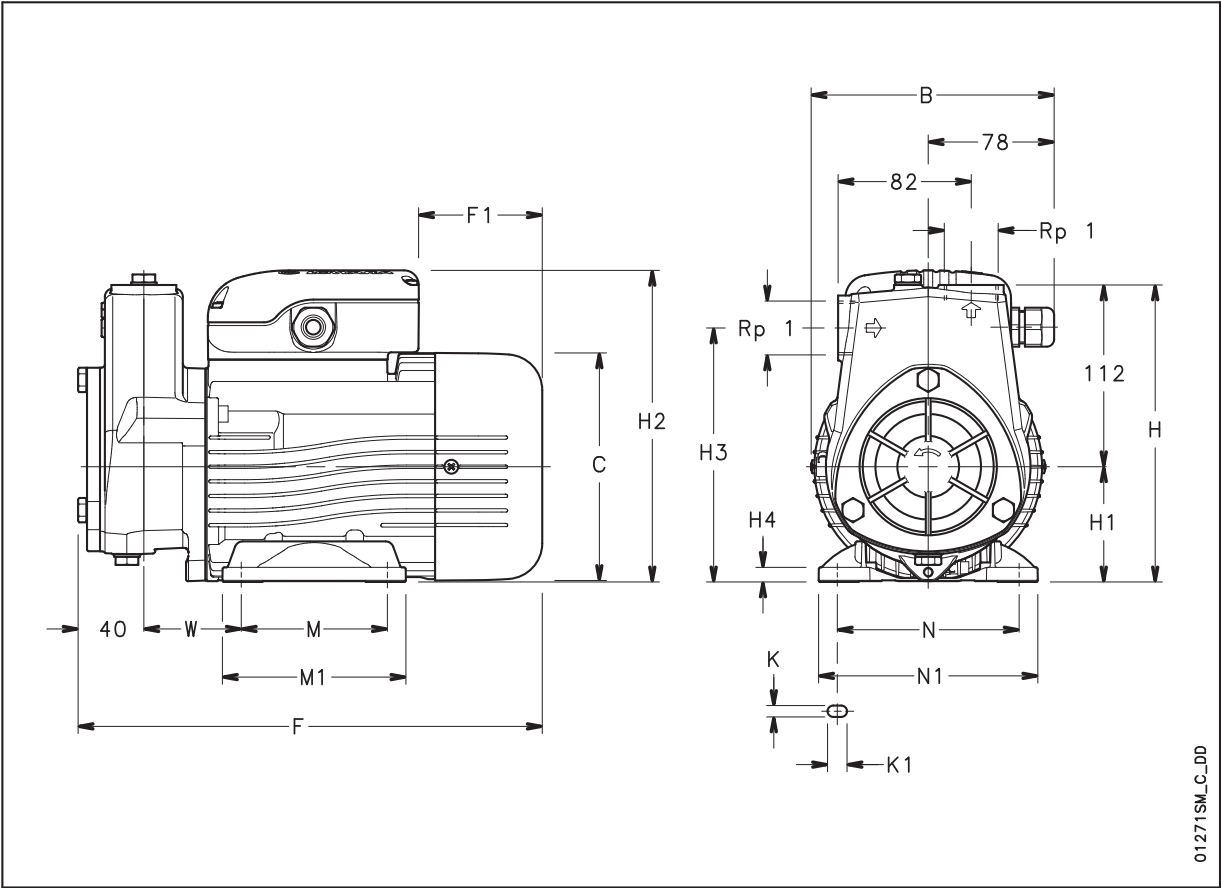

PUMP TYPE	DIMENSIONS (mm)																WEIGHT
	B	C	F	F1	H	H1	H2	H3	H4	M	M1	N	N1	K	K1	W	kg
SP5	150	140	286	76	183	71	192	156	9	90	113	112	135	7	12	60	11
SP7	150	140	286	76	183	71	192	156	9	90	113	112	135	7	12	60	12
SP5T	150	140	286	76	183	71	192	156	9	90	113	112	135	7	12	60	11
SP7T	156	155	325	113	192	80	209	165	10	100	124	125	153	9	12	72	15

sp-2p50-en_b_td